




293-334

### COOLANT PROOF MICROMETER

- IP65 protection level, enabling use in environments exposed to cutting oil, etc\*.  
\*Anti-corrosion treatment is required after use.
- Measurement data output function is available with a water-resistant connection cable.
- Auto power ON/OFF function. Certificate of inspection\* is included.  
(50mm/2" or less range models) \*It is not the type used to obtain calibration certificates.
- With a standard bar except for 0-25mm/0-1" model.
- Supplied in fitted case. Plastic case up to 150mm/6", Wooden box over 150mm/6"

Series 293 - IP 65

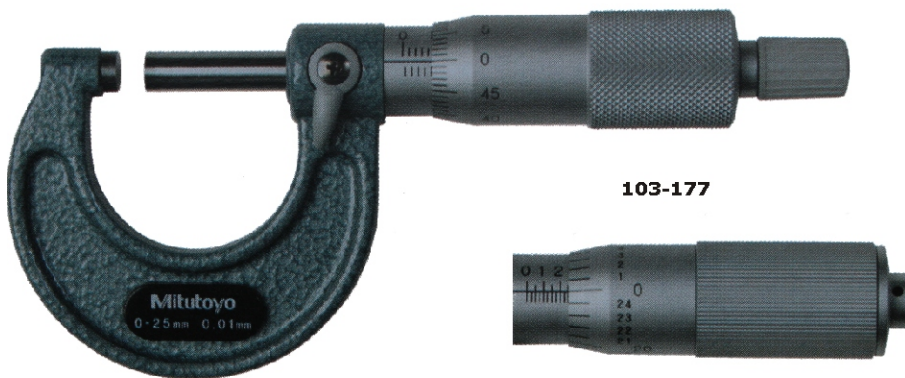


103-177

103-127 Friction thimble

### OUTSIDE MICROMETERS

- Hammertone-green, baked-enamelfinished frame.
- Ratchet Stop or Friction Thimble for exact repetitive readings.
- With a standard bar except for 0-1" model

Series-103

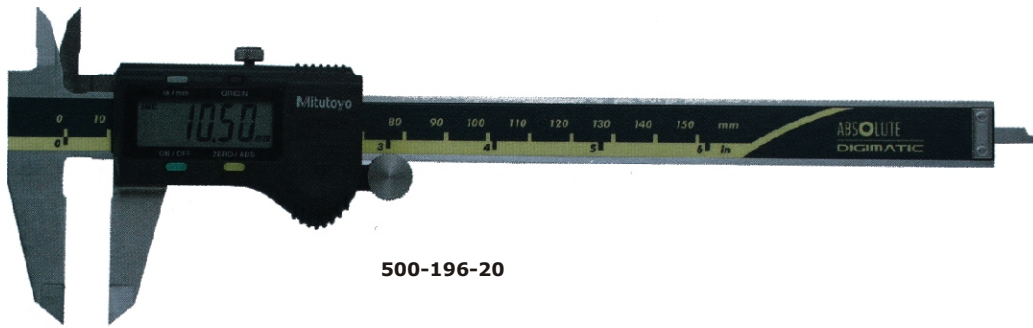

500-196-20

### DIGIMATIC CALIPER

- Large and clear LCD readout.
- The ZERO/ABS key allows the display to be Zero-Set at any slider position along the scale for incremental comparison measurements. This switch will also allow return to the absolute (ABS) coordinate and display of the true position from the origin point (usually jaws-closed point).
- Data Hold Unit (959143) is optional.
- Carbide-tipped jaw type calipers are also available.
- With thumb roller. Except 500-500-10, 500-501-10, 500-502-10.
- Supplied in fitted plastic case. Except 1000mm / 40" supplied in wooden case.

### Series 500



530-312

### VERNIER CALIPERS

- Can measure OD (outside diameter), ID (inside diameter), depth, and steps.
- The small vernier face angle (14°) provides easy reading.
- Dual reading scales on vernier. (metric/inch and inch models only)
- Lock screw for holding the sliding jaw position.
- Carbide-tipped jaw type calipers are also available.
- Supplied with vinyl holster in fitted carton. Except 600mm / 24" models are carton only. 1000mm / 40" supplied in wooden case.

### Series 530